

ANADOLU



Floating Crane Barge
Lifting Capacity: 400 Tons x 4
Lifting Capacity MAX: 1,600 Tons



FLOATING CRANE BARGE

Floating Crane	: 1,600 Tons
Classification	: Türk Loydu
L.O.A.	: 91,44
LBP	: 87,78
Breadth	: 27,43
Depth	: 6,10
Draught (Min)	: 1,60
Draught (Load Max)	: 4,875
Gros Ton	: 4,223
DWT	: 8,757

LUFFING WINCH

Capacity	: 38 ton / 25 m/min
Wire Spec.	: $\varnothing 40 / 2 \times 4,300\text{m} = \text{Total } 8,600\text{m}$

MAIN HOISTING WINCH

Main Hook	: 400 ton x 4 set
Capacity	: 38 ton / 25 m/min
Wire Spec.	: $\varnothing 40 / 2 \times 2,200\text{m} + 2 \times 2,445\text{m} = \text{Total } 9,290\text{m}$

AUX HOISTING WINCH

Aux Hook	: 60 ton x 2 set
Capacity	: 20 ton / 24 m/min
Wire Spec.	: $\varnothing 40 / 2 \times 840 = \text{Total } 1,680\text{m}$

MOORING WINCH 4 set

Capacity	: 30 ton / 10 m/min
Wire Spec.	: $\varnothing 44 \times 750 \text{ m}$

TECHNICAL DATA

Generator : 3 sets,
capacity 520 kw type
6M33D633E200
4 cycle,
1500 rpm.

Ballast Pump : 2 sets
ECO SNL 150-315
capacity 250 m3 / 30 kw

Fine Pump : 2 sets
ECO SNL 65-200
capacity 50 m3 / 15 kw

NAVIGATIONS

Public Addressor

Auto Telephone Exchange , 1 set

Common Battery Telephone, 1 set

Fire & General Alarm System, 1 set

Portable Telephone System, 1 set

CCTV Camera System, 1 set

Navigation Light, 1 set

PERFORMANCE

Lifting Capacity : 1,600 tons

Lifting Speed : 1,4 m/min

Main Hooks Liftings Leight : 71,00 m


Underwater : - 50,00 m

ACCOMMODATION

Total Capacity : 20 Persons


LIFE SAVING & FIRE EXTINGUISHER ENDOWMENT

20 Persons

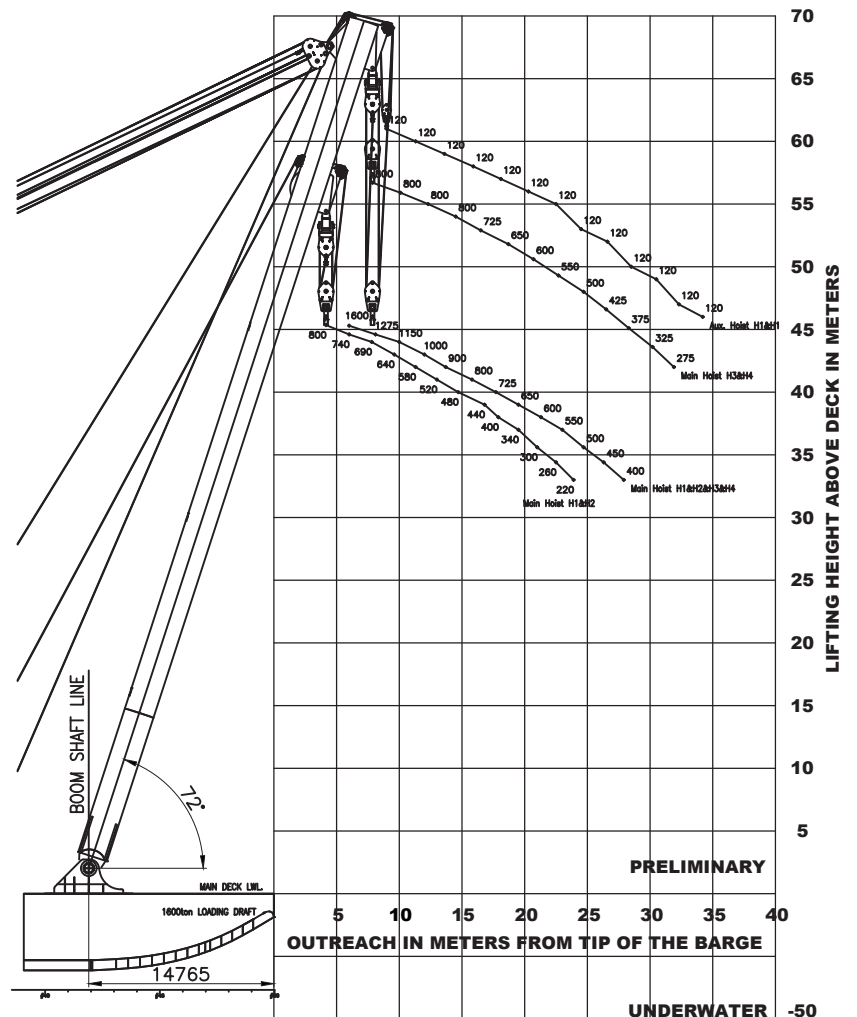


ANA BOYUTLAR

TAM BOY Loa	: 91,44 m
SU HATTI BOYU Lwl	: 88,24 m
GENİŞLİK Bmax	: 27,43 m
DERİNLİK	: 6,10 m
DRAFT T	: 2,00 m
DEPLASMAN	: 4258 ton
CB	: 0.97
POSTA ARASI MESAFE	: 1.83 m

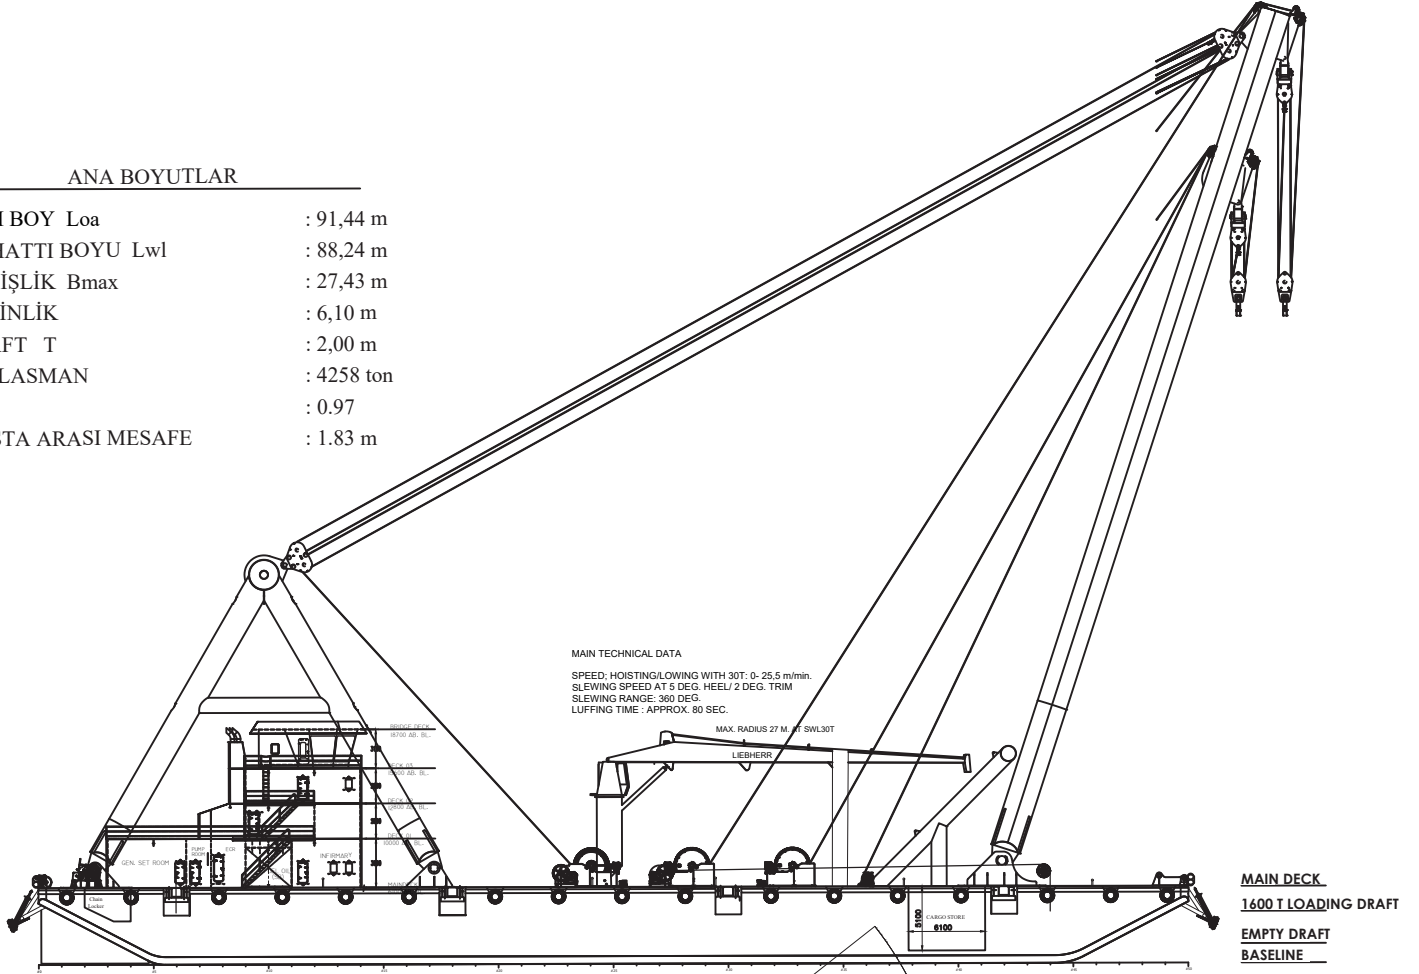

PROFILE VIEW

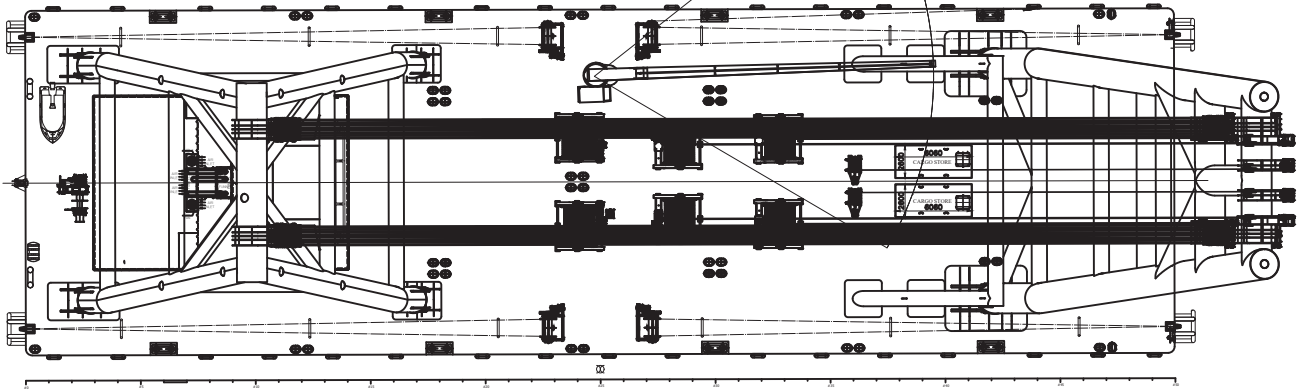

MAIN DECK